


Flap Wheels of abrasive cloth (ex-stock) for angle grinder



Description	d ₁ mm	b mm	Thread	n recom- mended (1/min.)	n max. (1/min.)	available grits, Reg. al.-oxide NK			
						40	60	80	120
NEW LSL 125020	125	20	M14	9600	12200	■	■	■	■

Packing unit: 5 pcs.

Ordering example: LSL 125020, M 14, Grit 120

V_{max.}: 80 m/s

Advantages:


- Fits onto standard angle grinders
- Replaces the use of shaft mounted flap wheels (where no straight grinder is available)
- No flange needed
- Ideal for welding seams on Stainless Steel (tanks)

Application examples:

- De-rusting, removal of surface coatings and oxidise layers
- Cleaning of welding seams
- Grinding in the tank industry
- Grinding in the assembling industry

Application info:

Only to be used on the periphery of the wheel

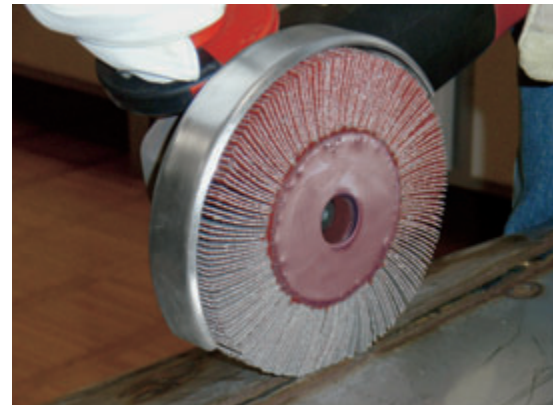

■ delivery ex-stock

▲ quick delivery

○ available as special service

⬡ regrind service, please enquire

